


BASIC INFORMATION ABOUT THE PRODUCT



- Three-sided fireplace insert with triple glazing, offering a three-sided view of the flames.
- Various types of handles and covers are available, as well as an optional version made of black concrete.
- Inserts made of high-quality P265GH boiler steel, which is resistant to continuous operation at elevated temperatures. A reinforced door profile was used.
- Production is carried out using a modern fleet of machines: welding robots, press brakes, laser cutting machines.
- It meets restrictive exhaust emission standards and the ECODSIGN directive thanks to the use of an exhaust gas after-combustion system and high efficiency.
- The innovative ventilated handle protects against burns. Suitable for houses with heat recovery.
- A built-in intake with a damper allows for smooth, integrated regulation of the amount of air supplied.
- The air curtain provides a „clean glass“ effect, and easy cleaning is provided by a cast iron grate with a removable ash container.

Nominal power [kW]	11
Heating load range [kW]	5,5-14
Thermal efficiency [%]	83
CO emission (at 13% O2) [g/m3]	0,038
Pollen emission [g/m3]	1,243
Average fuel consumption [kg/h]	3
Recommended dimensions of outlet grilles [cm2]	770-88
Recommended dimensions of inlet grilles [cm2]	440-720
Glass dimensions [mm]	713x423x265
Flue diameter [mm]	197
Inlet diameter [mm]	123
Weight [kg]	121
Efficiency factor	110,4



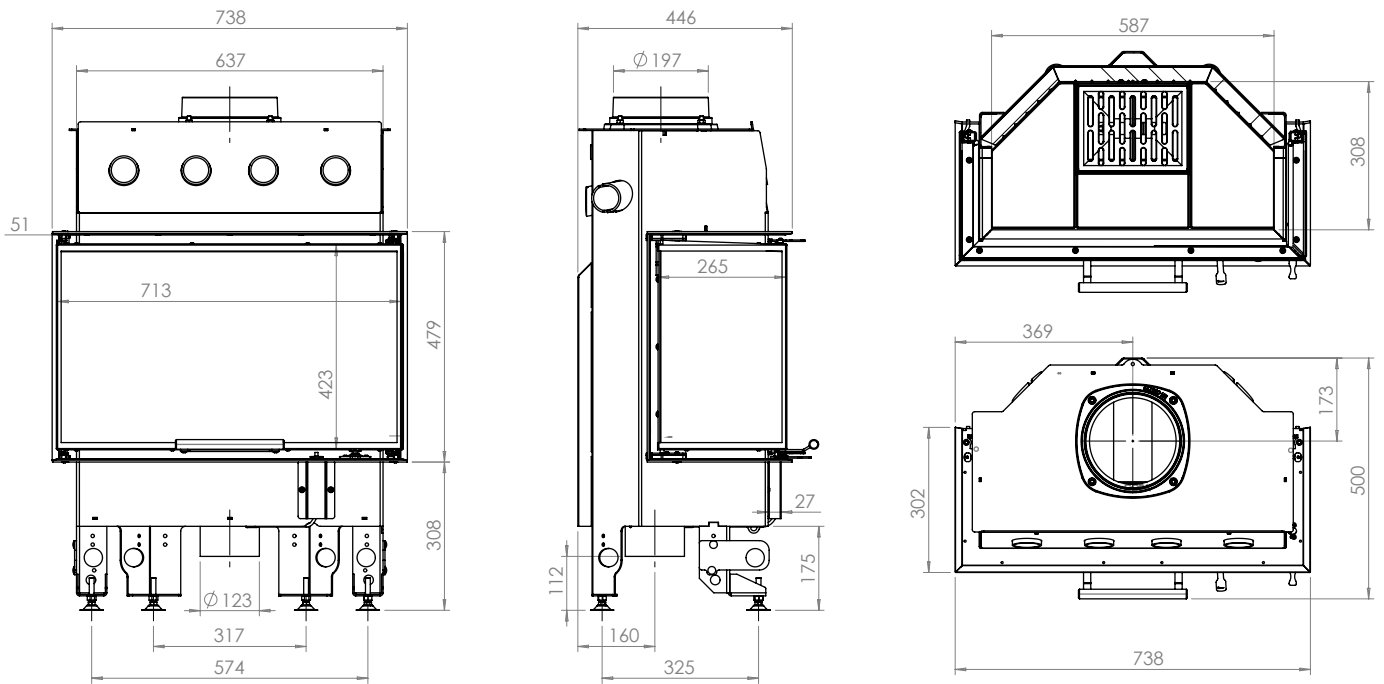

# ALBERO

## AL11.C.H.D